


Applications: metal sheets, stainless steel, light alloy, non-ferrous metals,
plastic materials.
Assembly: by pressure and riveting.

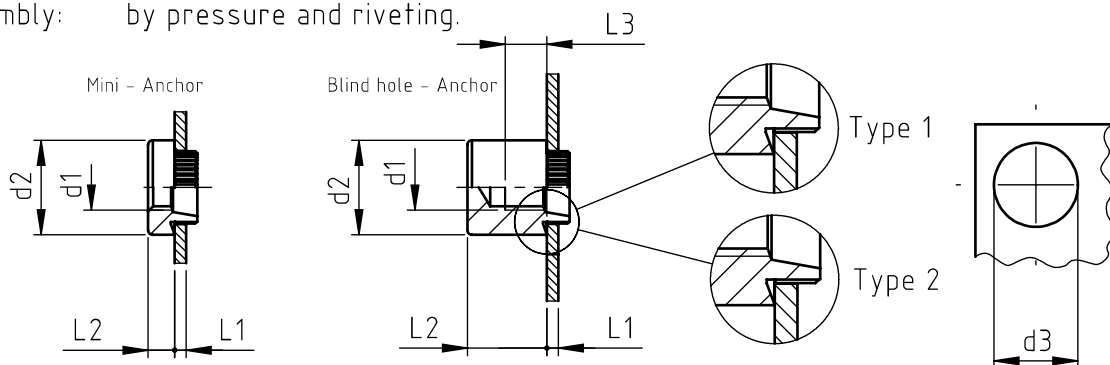

Thanks to their reduced sizes, Mini-Anchors allow saving weight and space.

code	sheet thickness L1	type
721 0 ____	0,5 ÷ 0,6	1
724 0 ____	0,8 ÷ 1,0	1
726 0 ____	1,4 ÷ 1,6	1
728 0 ____	2,0 ÷ 2,2	2
729 0 ____	2,3 ÷ 2,5	2
731 0 ____	2,9 ÷ 3,1	2

code	metric thread d1	external diameter d2	nut height L2	hole diameter d3	weight (*) Kg/100
_____020__	M 2	5,0	2,3	3,5	0,040
_____025__	M 2,5	5,5	2,8	4,2	0,050
_____030__	M 3	5,5	2,8	4,2	0,040
_____040__	M 4	7,0	3,2	5,5	0,080
_____050__	M 5	8,5	3,8	6,5	0,120
_____060__	M 6	10,0	5,1	7,7	0,220
_____080__	M 8	12,0	6,5	9,7	0,350

(*) Approx. values found on the weight of the nuts 726 _____.12

Blind hole-Anchor

code	sheet thickness L1	type
744 0 ____	0,8 ÷ 1,0	1
745 0 ____	1,1 ÷ 1,3	1
746 0 ____	1,4 ÷ 1,6	1
748 0 ____	2,0 ÷ 2,2	2
749 0 ____	2,3 ÷ 2,5	2
751 0 ____	2,9 ÷ 3,1	2
754 0 ____	3,8 ÷ 4,0	2
758 0 ____	5,0	2

code	metric thread d1	external diameter d2	nut height L2	hole diameter d3(a) d3(b)	thread depth
_____030__	M3	8,0	8,5	6,0 5,8	3,0
_____040__	M 4	9,5	9,0	7,0 6,8	4,0
_____050__	M 5	11,0	10,0	8,4 8,2	5,0
_____060__	M 6	12,5	10,5	9,7 9,5	5,5
_____080__	M 8	16,0	12,0	13,2 12,9	5,5
_____100__	M10	19,0	16,5	15,5 15,2	6,0
_____120__	M12	25,4	19,0	19,6 19,3	7,0

(1) type 1: 20° turned contacting surface (2) type 2: flat contacting surface

Hole d3: (a) For standard applications

(b) For high tensile stress applications

Non binding dimensions, expressed in mm.



Standard



On demand



Not manufactured

Material: steel, stainless steel, light alloy, brass

Finishing: steel: natural (on demand) _____ .10
 steel: zinc-plated _____ .12
 stainless steel: natural (on demand) _____ .50
 light alloy: natural (on demand) _____ .70
 brass: natural (on demand) _____ .80

Tolerances: ISO 2768 - m

Thread d1: metric ISO 6 H

Example: Anchor closed rivet bushing, M5 thread,
sheet thickness 1,5 mm, zinc-plated steel: 746 0 050.12

