


Application: at the end of square metallic and non-metallic tubes.
Assembly: by pressure.

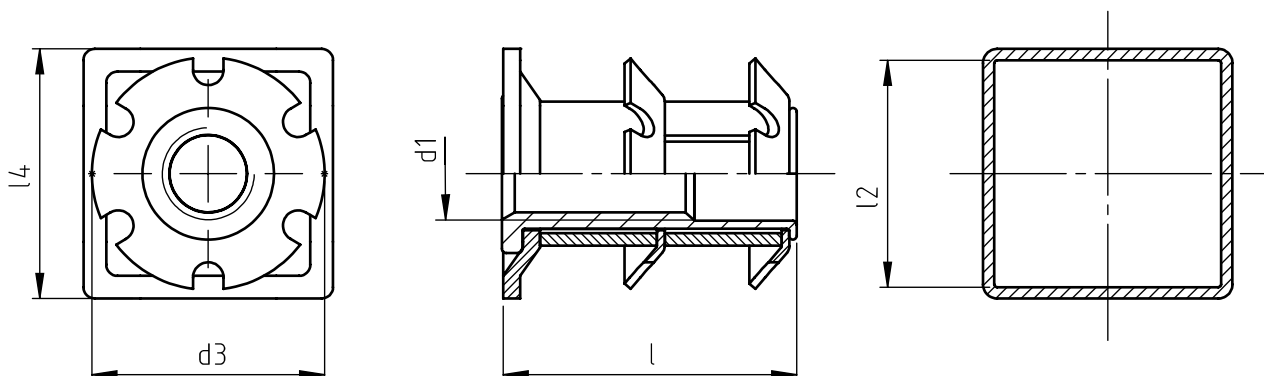

code	d1	l2*	d3	l	l4
ITT2Q/M 8/15.7	M 8	15,7 ÷ 17,1	18,1	26	19
ITT2Q/M 8/18.9		18,9 ÷ 20,2	20,9		22
ITT2Q/M 8/22.1		22,1 ÷ 23,4	24,7		25
ITT2Q/M 8/25.3		25,3 ÷ 26,6	27,5		28
ITT2Q/M 8/26.6		26,6 ÷ 27,6	28,9		30
ITT2Q/M 8/28.4		28,4 ÷ 29,8	30,7		32
ITT2Q/M 8/34.8		34,8 ÷ 36,1	37,9		38
ITT2Q/M10/22.1	M10	22,1 ÷ 23,4	24,7	26	25
ITT2Q/M10/26.6		26,6 ÷ 27,6	28,8		30
ITT2Q/M10/34.8		34,8 ÷ 36,1	37,9		38

Non binding dimensions, expressed in mm.

* It is advisable to carry out some preliminary assembling tests in order to determine the best product.

For proper use it is suggested to use a locknut for the pin.


After the insertion of the Crow Nut do avoid heat treatments, galvanization and other heating operations that might compromise the characteristics of the product.

 Standard

 On demand

 Not manufactured

Material: steel
Example: 2 crowns flange insert
for square tubes, M 8 threaded,
tube internal dimension 23x23 mm:
ITT2Q/M 8/22,1



ITT2Q/M 8/22,1