
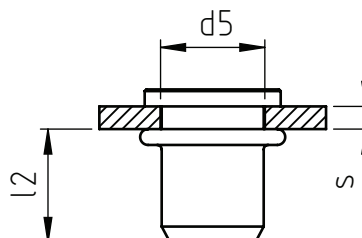


Application: metal and not metal sheets.  
Assembly: with special hand or pneumatic tools.

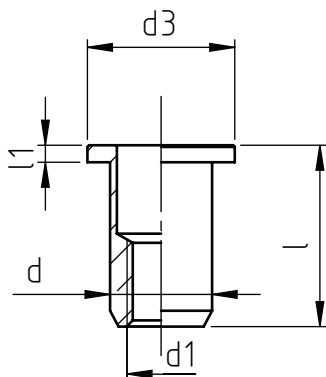

code	s grip	l	d1 6H	d	d3	l1 ~	d5 +0,15 0	l2 *
TC M 4/8S	0,5 ÷ 2,0	11,2	M 4	6	9	0,8	6	7
TC M 5/8S	0,5 ÷ 2,5	12,8	M 5	7	10	1,0	7	7,5
TC M 6/8S	0,8 ÷ 3,0	16	M 6	9	13	1,5	9	8,5
TC M 8/8S	0,9 ÷ 3,0	18	M 8	11	15	1,5	11	11
TC M10/8S	1,0 ÷ 3,5	20	M10	13	17	1,5	13	13,5

Non binding dimensions, expressed in mm.

\* Dimension determined from the average of the grip "s" min and max values.

■ Standard

□ On demand

--- Not manufactured

Material: steel  
Finishing: white zinc-plated  
Tolerance: where not specified, degree of accuracy (coarse) according to UNI EN 22768-1  
Thread: ISO 6 H metric  
Example: blind threaded nut, cylindrical head, round shank, steel, grip 2,0 mm, M 6 thread:  
TC M 6/8S

