


Application: metal and not metal sheets.
 Assembly: with special hand or pneumatic tools.

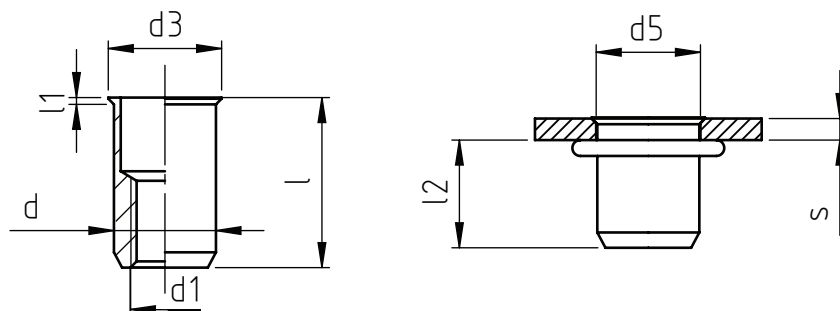

code	s grip	l	d1 6H	d	d3	l1 ~	d5 0,15 0	l2 *
TFM M 4/8S	0,5 ÷ 2,0	10	M 4	6	7	0,45	6	6,5
TFM M 5/8S	0,5 ÷ 2,5	12	M 5	7	8	0,5	7	7,5
TFM M 6/8S	0,8 ÷ 3,0	15	M 6	9	10	0,5	9	9
TFM M 8/8S	0,9 ÷ 3,0	16	M 8	11	12	0,5	11	11
TFM M10/8S	1,0 ÷ 3,0	20,5	M10	13	14	0,5	13	13,5

Non binding dimensions, expressed in mm.

* Dimension determined from the average of the grip "s" min and max values.

Standard
 On demand
 Not manufactured

Material: steel
 Finishing: white zinc-plated
 Tolerance: where not specified, degree of accuracy
 (coarse) according to UNI EN 22768-1
 Thread: ISO 6 H metric
 Example: blind threaded nut, low profile head,
 round shank, steel, grip 2,0 mm,
 M 6 thread:

TFM M 6/8S

