

**SL-FC** Stratlock® Female Flush Mount

**SL-FC-FR** Stratlock® Female Flush Mount - fire rated

INDUSTRY FIT: 

**STRATLOCK SL RANGE**

**SPECIFICATIONS:**

The SL-FC / SL-FC-FR provides rapid installation of heavy panels to solid substrates. Designed specifically for contract interior fitout applications to reduce onsite installation time. The SL-FC is ideal for applications where framework or grid structure is not available (e.g. sheet metal, aluminium, fibreglass, MDF or plywood). SL-FC fits into a pre-drilled ø40mm hole, and screw fixes with 3 x #5 screws. The Patent Pending internal load chassis of the female clip creates 4mm supported movement of the panel in any direction before locking into place with a 10 or 18kg pull out load, depending on the male clip used (SL-M10 or SL-M18). Distance between panel and substrate when installed is 10.5mm at first click, and 7mm when pressed into final position. Patent Pending.

**BENEFITS**

- Strongest available fixing from Fastmount
- Flush fit for solid substrates
- Supported movement of the panel 4mm in any direction before locking into final position.
- No special tools required for installation
- Acoustic isolation between panel and frame
- Option of 10kg or 18kg pull out load with SL-M10 or SL-M18
- 7mm clearance between panel and frame

**APPLICATIONS**

- Commercial interior fitout
- Residential interior fitout
- Architectural applications
- Mounting heavy wall panels
- Aluminium, sheet steel, fibreglass, plywood or MDF substrates

**SL-FC**

**SL-FC-FR**



**USE WITH:**

SL-M10, SL-M18, SL-M18-FR



**NEW PRODUCT**


**MATERIAL:**

White acetyl, rubber o-ring  
FR PBT, rubber o-ring

**MORE INFO:**

Installation Guide SL-FB  
Clip Layout Guide TD-16

**INSTALLATION:** Partially exploded through section showing typical installation method

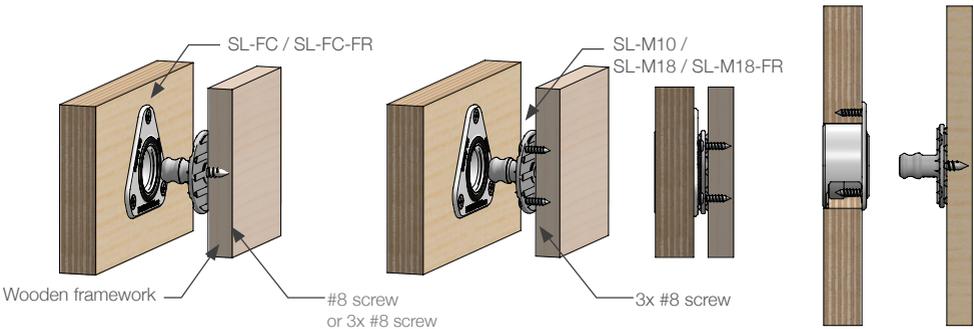

The Fastmount® multi-award winning system has revolutionized the mounting of panels. Panels can easily be removed and refitted in any sequence time after time. For further information or technical support contact: [info@fastmount.com](mailto:info@fastmount.com)